

Series 475

Convectron® Vacuum Gauge Controller



The Series 475 Convectron® Vacuum Gauge Controller combines with the industry-standard Series 275 Convectron gauge to provide high performance vacuum pressure measurement using a unique variation of thermal conductivity. The Convectron gauge is a convection-enhanced Pirani design that features individually calibrated gauges, temperature compensation and convection technology for increased accuracy and repeatable vacuum measurements over seven decades from 1×10^{-4} Torr (1×10^{-4} mbar; 1×10^{-2} Pa) to atmosphere.

The Series 475 Convectron Controller is a third-generation RoHS compliant Convectron gauge controller that combines rugged reliability with key features for ease of use and system integration. It includes several features such as

self-diagnostics, integrated Convectron gauge simulation, and built-in gas curves to adjust for various vacuum environments. The Series 475 is easy to use with a highly visible Vacuum Fluorescent Display (VFD) and intuitive front panel controls that allow gauge calibration and adjustment of vacuum measurement parameters without the need for special tools. The Series 475 Convectron Controller can be used as a simple readout device for basic vacuum system control or integrated into a more sophisticated control system. The Series 475 Controller provides a range of control I/O options including an analog output, set point relays and a serial communication interface. The compact packaging and innovative electronics make the Series 475 Convectron Controller and Convectron technology the ideal solution for today's vacuum measurement systems.

Product Features

- Wide range vacuum pressure measurement from atmosphere to 1×10^{-4} Torr (1×10^{-4} mbar, 1×10^{-2} Pa)
- Highly Visible Vacuum Fluorescent Display (VFD)
- Highly configurable I/O options including an analog output, set point relays, serial communication interface
- Pre-programmed gas curves for N₂, Ar, He, CO₂, and O₂
- Intuitive menu control for simplified configuration and parameter setup




Key Benefits

- High-performance compact vacuum controller for bench top and panel mount applications
- Built-in convectron gauge simulator
- Self-diagnostics

Convectron technology has become the industry-standard with over 35 years of unmatched performance, repeatability and reliability. To assure the highest level of accuracy and gauge-to-gauge reproducibility, each Convectron Gauge is burned-in for stability and individually calibrated for unmatched accuracy. As the industry standard, Convectron Gauges are in use today on hundreds of thousands of vacuum processes throughout the world, making Convectron technology the best choice for your vacuum measurement applications.

- **Wide Measurement Range:** Vacuum system pressure can be monitored continuously from 1×10^{-4} Torr (1×10^{-4} mbar, 1×10^{-2} Pa) to atmosphere.
- **High Measurement Resolution:** Designed to take full advantage of Convectron Gauge technology with 1 Torr (1 mbar, 0.1 Pa) resolution at atmosphere and 0.1 mTorr (1×10^{-4} mbar, 1×10^{-2} Pa) resolution at low pressure.
- **Vacuum Fluorescent Display:** The VFD is easier to read from greater distances than other types of displays. The display is configurable to use scientific notation or two ranges (Torr and mTorr, mbar and 10^{-3} mbar, or kPa and Pa) to provide a continuous measurement readout from atmosphere to low pressure.
- **Process Set Point Option:** Relay contacts allow control of other vacuum equipment, such as valves, pumps, heaters, alarms, and safety interlocking.
- **Multiple Gas Curves:** Selectable N_2 , Ar, He, CO_2 and O_2 gas curves are pre-programmed, eliminating the need for individual calibration when changing the process gas.
- **Push-Button Controls:** Calibration and set point settings are easy to adjust using intuitive front panel controls. No special tools are required.
- **Easy-to-use Analog Signals:** Provides a one volt per decade logarithmic signal (0-7V or 1-8V) or a selectable non-linear signal (0-9V) that is backwards compatible with older Convectron gauge controllers.

- **Serial Communication Interface Option:** RS-232 interface allows easy integration with computer controlled systems.
- **Built-in Convectron Gauge Simulator:** Simulates a Convectron gauge, which allows system diagnostics without the need of a vacuum system.
- **Self Diagnostics:** The A/D (Convectron gauge bridge voltage) and analog outputs are continuously monitored for erroneous readings.
- **Compact 1/8 DIN Controller:** Easy to install in space restricted locations.
- **Rugged All-Metal Package:** Provides a high level of immunity to RF noise

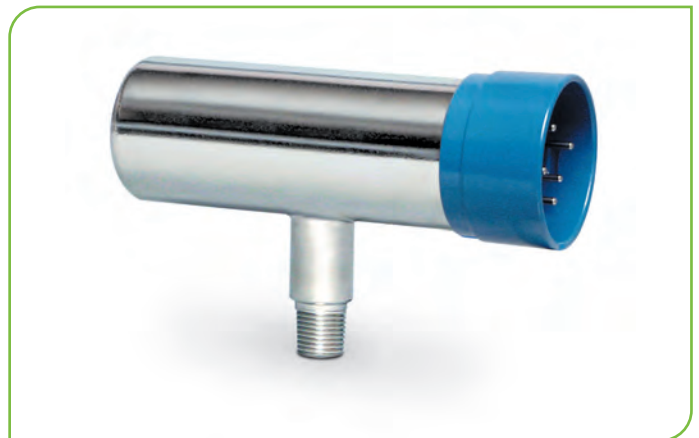

Convectron Gauge




Convectron Gauge Cable

Specifications

Measurement Range for Air and N₂ ^{(1), (2)}	<p>Torr</p> <p>mbar</p> <p>Pa</p>	<ul style="list-style-type: none"> • 1x10⁻⁴ to atmosphere • 1x10⁻⁴ to atmosphere • 1x10⁻² to atmosphere
Step Size at Minimum Pressure		1x10 ⁻⁴ Torr, 1x10 ⁻⁴ mbar, 1x10 ⁻² Pa
Display	Update Rate	<ul style="list-style-type: none"> • Vacuum Fluorescent • Every 0.5 sec
Input Power		12 to 24 VDC, 6 W continuous
Weight		720 gm (25 oz)
Operating Temperature		0°C to 40°C ambient
Non-Operating Temperature		-40°C to 70°C
Set Point Relays (optional)	Contact Rating Range Resolution	<ul style="list-style-type: none"> • (2) single pole, double-throw (SPDT) • 5 A @ 250 VAC resistive load • 1x10⁻³ to 1000 Torr, 1x10⁻³ to 1333 mbar, 1x10⁻¹ Pa to 133 kPa • 2 significant digits
Communication Interface (optional)	Data Format Baud Rate Address (RS-485 only)	<ul style="list-style-type: none"> • RS-232 or RS-485 • ASCII, 8 data bits, one stop-bit, no parity, no handshake • 1200, 2400, 4800, 9600, 19200, 38400 (19200 Default) (software selectable) • 0 to 63 (software selectable)
Convectron Gauge	Sensor Material Other Materials Exposed to Gas Internal Volume Weight Gauge Operating Temperature Gauge Bakeout Temperature Mounting Orientation Cable Bakeout Temperature	<ul style="list-style-type: none"> • Gold-plated tungsten, platinum • 304 stainless steel, borosilicate glass, Kovar®, alumina, NiFe alloy, polyimide • 35 cm³ (2.14 in.³) • 85 grams (3 ounces) • 0°C to 50°C ambient • 150°C maximum, non-operating, cable disconnected • Horizontal preferred • 105°C maximum
Compliance		CE

¹ Measurements will change with different gases and mixtures. Correction parameters for common gases are provided in the instruction manual.

² Convectron Gauges are not intended for use with flammable or explosive gases.

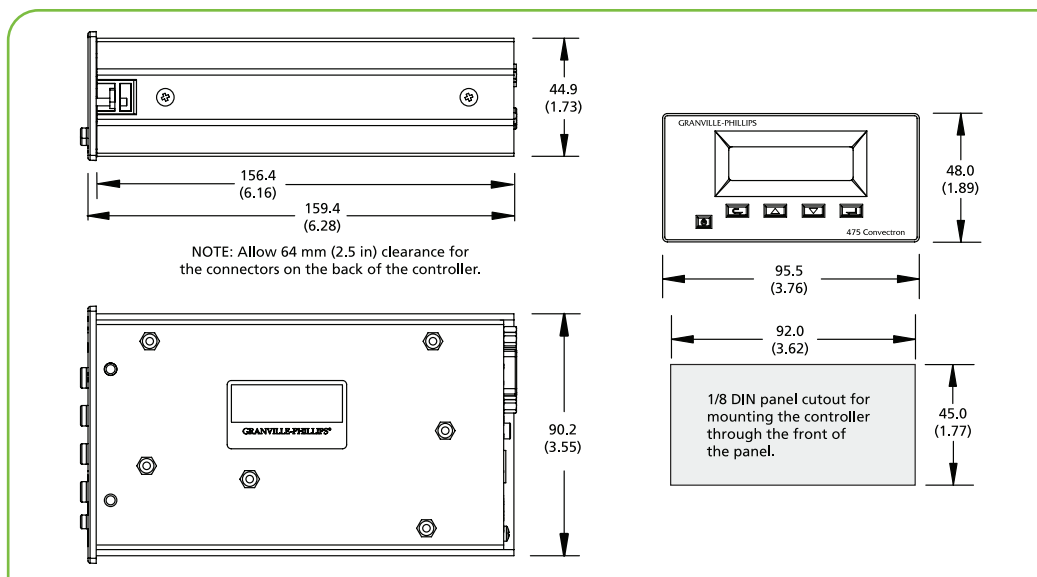

Dimensional Drawing

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).

Ordering Code Example: 475001-00-T	Code	Configuration
Convectron® Vacuum Gauge Controller		
1/8 DIN, panel mount with digital display	475001	475001
Interface Options (Slot X)		
None RS-232 RS-485	0 A B	0
Set Point Option (Slot Y)		
None 2 set points	0 2	0
Measurement Units (user configurable)		
Torr mbar Pascal	T M P	T
Ordering Code Example: 475008-1	Code	Configuration
Power Supply		
Universal Power Supply	475008	475008
Power Cord Plug Type		
North America 115 VAC & Japan 100 VAC North America 240 VAC Universal Europe 220 VAC United Kingdom 240 VAC	1 2 3 4	1
Convectron Gauge Cables		
10 feet (3 meters) 25 feet (7.6 meters) 50 feet (15.2 meters) 100 feet (30.5 meters) 200 feet (61 meters) 500 feet (152.4 meters)	475012-10 475012-25 475012-50 475012-100 475012-200 475012-500	
Convectron Gauges - Gold-plated Tungsten (Platinum sensor gauges are available).		
1/8 NPT / 1/2 inch tubulation 1/4 inch VCR® type female fittings 1/2 inch VCR® type female fittings 3/8 inch VCO® type male fitting 1.33 inch (NW16CF) rotatable Conflat® type flange 2.75 inch (NW35CF) rotatable Conflat® type flange NW16KF flange (welded) NW25KF flange (welded) NW40KF flange (welded)	275071 275185 275282 275233 275256 275238 275203 275196 275316	

Analog Output Signals

Standard analog output is 0 to 7 Volts that is linear in voltage with the log of pressure. Two alternate analog outputs can be selected using the front panel buttons: either 1 to 8 Volts that is linear in voltage with the log of pressure or 0 to 9 Volts that is non-linear with the log of pressure and mimics the output of older vacuum gauge controllers.

