



Pressure &

Vacuum Measurement Solutions

WWW.MKSINSTR.COM

722B

BARATRON® GENERAL PURPOSE ABSOLUTE CAPACITANCE MANOMETER

Today's process environments require small-sized pressure measurement instruments that provide accurate, repeatable, and reliable measurements at a lower cost. MKS has applied its expertise in capacitance manometer design and manufacturing technology to the development of the compact, 722B Baratron® General Purpose Absolute Capacitance Manometer. The flexible design of the 722B makes it an ideal solution for retrofit applications as well as new equipment designs.

Robust sensor construction provides high overpressure tolerances, reducing errors caused by occasional line pressure spikes. All sensor wetted surfaces are made from Inconel® to ensure maximum compatibility with many process gases¹. Sophisticated technology and strict process controls ensure clean, smooth finishes (<10 Ra) on all wetted surfaces. Signal conditioning circuitry is assembled using the latest techniques in surface mount technology. All transducers are backed with a full two-year warranty.

Features & Benefits

Flexible

- Smaller manometer size helps achieve overall system size reduction
- Signal output of 0-10 VDC or 0-5 VDC available
- Full Scale Range as low as 1 Torr
- High accuracy over a wide operating temperature range

Robust

- Overpressure limit of 45 psia or 2x F.S. (whichever is greater) assures no degradation in zero repeatability or performance
- Corrosion resistant — all-metal, all-welded construction exposes only Inconel and stainless steel to the media

Compatible

- All wetted sensor surfaces are micro-finished to <10 Ra, eliminating inclusion sites for corrosion growth
- Drop in replacement for earlier Baratron capacitance manometers

¹Contact Applications Engineering for specific applications.




Specifications and Ordering Information

Configuration	Absolute, single-ended
Full Scale Ranges	1 Torr through 25,000 Torr (mmHg) (0.02 psia through 500 psia)
Accuracy (including non-linearity, hysteresis, and non-repeatability)	0.5% of Reading
Response Time	< 20 msec
Temperature Coefficients	
Zero	0.008% of F.S./°C (10 Torr through 25,000 Torr); 0.020% of F.S. (1 and 2 Torr)
Span	0.04% of Rdg./°C
Ambient Operating Temperature	0° to 50°C (32° to 122°F), 15° to 40°C (59° to 104°F) (1 and 2 Torr only)
Overpressure Limit	45 psia or 2x F.S., whichever is greater
Burst Pressure	10x F.S. or 100 psi, whichever is greater
Materials Exposed to Gases	Inconel® (Optional Fittings: 316SS)
Power	
Input	0 to 10 Volt output, +13 VDC to +32 VDC @ 10 mA max. (For drop-in replacements of 122A and B which have a ±15 VDC input, use Input/Output Ordering Code 2. See below.)
Output	0 to 5 Volt output, +10.8 VDC to +32 VDC @ 10 mA max (regulated if below 13 VDC) 0 to 10 VDC into > 10K ohms load 0 to 5 VDC into > 10K ohms load
Compliance	CE ¹
Electrical Connectors	9-pin Type "D", 15-pin high density Type "D", 15-pin Type "D" on 4.70" (118mm) ±0.5" (12.7mm) cable, 4-pin bayonet type, Bendix® -compatible, 5-pin terminal strip
Fittings	
Standard	½" tube
Optional	¼" VCR® female, 8 VCR female, NW 16 KF ² , mini-CF

¹ For CE Compliance, an overall metal braided shielded cable, properly grounded at both ends, is required.

² NW 16 KF fittings cannot be used on units with a pressure range of 10,000 mmHg and higher. For units with a pressure range of 5,000 mmHg, an HPS Overpressure ring must be used.

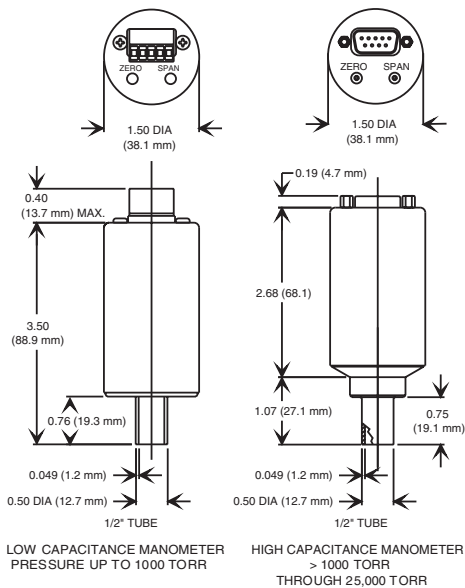

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).

Ordering Code Example: 722B12TCE2FJ

722B	Code	Configuration
722B	722B	722B
Pressure Range Full Scale (mmHg)		
1	01T	12T
2	02T	
10	11T	
20	21T	
30	31T	
50	51T	
100	12T	
250	RDT	
500	52T	
1,000	13T	
2,000 (must be ordered with a fitting)	23T	
5,000 (must be ordered with a fitting other than NW16KF)	53T	
10,000 (must be ordered with a fitting other than NW16KF)	14T	
20,000 (must be ordered with a fitting other than NW16KF)	24T	
25,000 (must be ordered with a fitting other than NW16KF)	RCT	
Fittings		
¼" VCR Female	CD	CE
½" Tube	BA	
8 VCR female	CE	
Mini-CF, rotatable	HA	
NW 16 KF	GA	
Input/Output		
+13 to +32 VDC/0-10 VDC	2	2
+13 to +32 VDC/0-5 VDC	3	
Accuracy		
0.5% of Reading	F	F
Connectors		
9-pin Type "D"	A	J
15-pin high density Type "D"	C	
4-pin bayonet type, Bendix® -compatible	D	
5-pin terminal strip	J	
15-pin Type "D" on 6-inch cable	K	



722B - 1/18
© 2009-2018 MKS Instruments, Inc.
All rights reserved.

MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. VCR® is a registered trademark of Swagelok® Co., Solon OH. Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV. Bendix® is a registered trademark of Amphenol Corp., Bendix Connector Operations, Sydney, NY.