

PDPCA

P-Series Dual-Zone EtherCAT® Pressure Controller



The P-Series Dual-Zone Pressure Controller (PDPCA) is a highly integrated closed-loop pressure control subsystem. It consists of an inlet pneumatic shut-off valve, two independent channels of pressure control with mass flow metering, and a vacuum outlet. The pressure control channels consist of two P-Series pressure controllers (PPCMA). Each PPCMA provides both pressure control and flow metering.

The PDPCA has been designed to reduce the overall cost of ownership of pressure control subsystems for backside wafer cooling, specifically for the latest two-zone electrostatic chucks (Figure 1).

As shown in Figure 2, the PDPCA consists of four sections – an inlet subassembly, two PPCMA pressure control

channels and an outlet subassembly. Pressurized gas (typically helium) is provided in the inlet subassembly. A pneumatic valve is then opened and the gas flow is split to two pressure control channels.

In the pressure control section, the PPCMA utilize MKS Baratron® capacitance manometers to measure pressure for each of the two zones. These pressures are compared to the pressure set points and an appropriate signal adjusts the position of the solenoid control valve to bring actual pressures into agreement with the set points. At the same time, mass flow is monitored on each channel by MKS mass flow meters calibrated for helium, which is the typical gas used for backside wafer cooling.

Product Features

- Complete backside wafer cooling subsystem in a compact package
- Two independent channels of pressure control, each with mass flow metering
- With single package integration, size and complexity are reduced greatly
- Can be used in any application requiring independent pressure control and mass flow metering to two distinct volumes
- Tunable response for fast time to set point without pressure overshoot
- Control stability of $\pm 0.1\%$ of set point



Key Benefits

- Available with EtherCAT® communications
- Less plumbing and cabling required
- Pressure measurement accuracy of $\pm 0.5\%$ of set point

Description

Downstream of the pressure control section, the outlet subassembly directs flow to the electrostatic chuck and provides a controlled "bleed" to vacuum through fixed orifices.

The purpose of the bleed is to insure that the pressure control system is not "dead-ended". Since leak past the wafer is typically very low, the controlled bleed provides additional pressure relief for faster response to set point.

The controlled bleed is done using a fixed orifice based on device outlet pressure of <math><1\text{ Torr}</math>. There is a choice of two orifice sizes for the controlled bleed. One is for a nominal flow of 13.5 sccm helium at a 14 Torr set point while the other is a nominal flow of 3.5 sccm of helium at a 9 Torr set point.

Communication and Control

The digital PDPCA features digital control electronics that are EtherCAT compliant communications. The PDPCA EtherCAT version is based on the SEMI ETG profile for EtherCAT pressure controllers.

To optimize pressure control performance, users may adjust gain, integral and differential (P, I, D) constants for each channel using the EtherCAT communications protocol. Control parameter adjustment may be required depending on system volume and pressure set points.

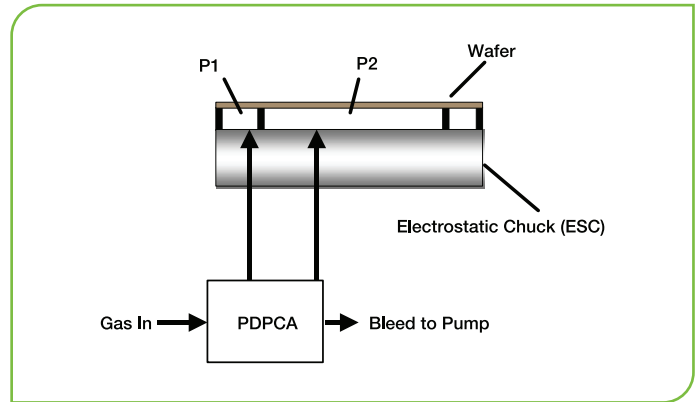


Figure 1 – Two Zone Backside Wafer Cooling

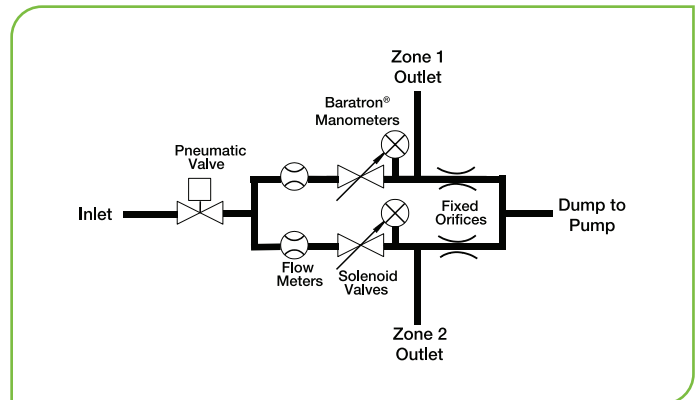


Figure 2 – PDP Functional Schematic

Specifications

| Performance | | | | | | |
|---|---|---|-----------------|-------------|---|---|
| Accuracy | Pressure Control Accuracy Pressure Transducer Mass Flow Meter | <ul style="list-style-type: none"> ±1.0% set point¹ ±0.5% Reading ±1.0% Full Scale² | | | | |
| Leak Integrity | Internal to External Through Closed Control Valve | <ul style="list-style-type: none"> <10⁻⁹ scc/sec He <1% Full Scale | | | | |
| Pressure Control | Range Stability at Set Point Control Time to Set Point ³ | <ul style="list-style-type: none"> 10-100% Full Scale <0.1% set point <2.0 seconds, typical - dependent on system configuration and control settings | | | | |
| Temperature Coefficient | Zero Span | <table border="0"> <tr> <td>Pressure</td> <td>Flow</td> </tr> <tr> <td> <ul style="list-style-type: none"> <0.02% Full Scale/°C <0.04% Reading/°C </td> <td> <ul style="list-style-type: none"> <0.05% Full Scale/°C <0.08% Reading/°C </td> </tr> </table> | Pressure | Flow | <ul style="list-style-type: none"> <0.02% Full Scale/°C <0.04% Reading/°C | <ul style="list-style-type: none"> <0.05% Full Scale/°C <0.08% Reading/°C |
| Pressure | Flow | | | | | |
| <ul style="list-style-type: none"> <0.02% Full Scale/°C <0.04% Reading/°C | <ul style="list-style-type: none"> <0.05% Full Scale/°C <0.08% Reading/°C | | | | | |
| Warm Up Time | | 1 hour | | | | |
| Mechanical | | | | | | |
| Maximum Inlet Pressure | | 45 psia ⁴ | | | | |
| Dimensions (L x W x H) | | <ul style="list-style-type: none"> 10.46 in (incl. fittings) x 3.36 in x 5.35 in 26.56 cm (incl. fittings) x 8.53 cm x 13.59 cm | | | | |
| Fittings | | Swagelok® 4 VCR® male compatible | | | | |
| Overpressure Limit | | 45 psia or 200% Full Scale, whichever is greater | | | | |
| Full Scale Range | Pressure Flow | <ul style="list-style-type: none"> 20, 50, or 100 Torr 20, 50 or 100 sccm | | | | |
| Pressure Transducer | | Absolute pressure capacitance manometer | | | | |
| Surface Finish | | Ra <10 μinches, electropolished | | | | |
| Weight | | 10.5 lbs. (4.8 Kg) | | | | |
| Wetted Materials | | 316L Stainless Steel, Inconel®, Nickel, Elgiloy®, Viton® | | | | |
| Electrical | | EtherCAT® | | | | |
| Input Power Required | | +24 VDC (<5 watts) | | | | |
| Connector | | 2 x RJ-45 (comm.) male, M8 male, 5 pin (power) | | | | |
| Data Rate Switch/Selection | | No switch | | | | |
| Comm. Rate(s) | | 100 Mbps | | | | |
| Mac ID Switches/Addresses | | 3 switches, 16 positions | | | | |
| Network Size | | Up to 4095 nodes | | | | |
| Visual Indicators | | <ul style="list-style-type: none"> LED Power (green) LED Error (red) LED Run (green) LED Comm (green) | | | | |
| Compliance | | CE | | | | |
| Environmental | | | | | | |
| Ambient Operating Temperature Range | | 15° to 50°C (59° to 122°F) | | | | |
| Storage Temperature Range | | -20° to 80°C (-4° to 176°F) | | | | |
| Storage Humidity Range | | 0 to 95% Relative Humidity, non-condensing | | | | |

¹ Includes controller error, linearity, hysteresis and repeatability.


² Includes linearity, hysteresis and repeatability.

³ Control tuning required for optimum performance.

⁴ Consistent with the overpressure limit of the transducer.

Ordering Information

| Contact MKS Applications Engineering for ordering code. | Code |
|--|-------|
| Model | |
| P Series Dual-Zone Pressure Controller | PDPCA |
| Full Scale Pressure Range | |
| 20 Torr | 21T |
| 50 Torr | 51T |
| 100 Torr | 12T |
| Full Scale Flow Rate (He equivalent) | |
| 20 sccm | 21 |
| 50 sccm | 51 |
| 100 sccm | 12 |
| Unit Configuration | |
| EtherCAT | 8 |
| Firmware | |
| EtherCAT Firmware | 10 |
| Gas and Bleed Flow Rate (Consult Applications Engineering) | |

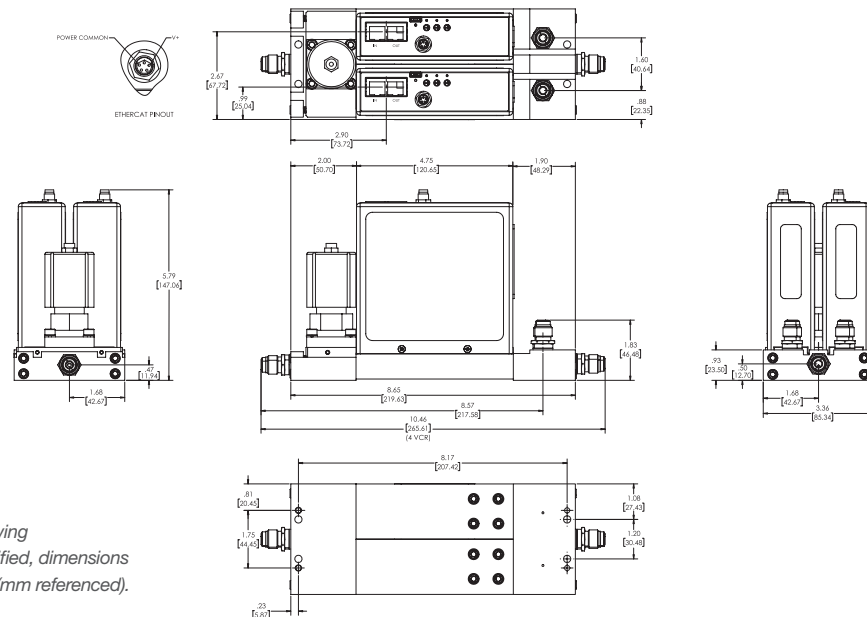

EtherCAT® Dimensional Drawing

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).