



Pressure &

Vacuum Measurement Solutions

WWW.MKSINST.COM

623F

UNHEATED ABSOLUTE BARATRON® CAPACITANCE MANOMETER WITH TRIP POINTS

The 623F unheated absolute capacitance manometer features two user adjustable process trip point relays, each with an adjustment range from 0.1% to 100% of Full Scale or voltage equivalent 0.01 to 10 VDC. Dual color LEDs indicate relay status. Typical relay uses include pump cross-over and valve activation. The 623F is an unheated temperature transducer, and is available in Full Scale ranges of 10, 20, 100, 500, and 1000 Torr. The instrument operates with ± 15 VDC ($\pm 5\%$) input at < 100 mA, and provides an output of 0 to 10 VDC linear with pressure.

The sensor of the 623F exposes only Inconel® to the process permitting the use with corrosive or dirty gases. Measurements are independent of gas composition.

Features & Benefits

Accurate

- Percent of Reading accuracy for more repeatable output signal
- Two process trip point relays with LED indicators and voltage test points
- Measures total pressure directly, independent of gas composition

Robust

- All Inconel® corrosion resistant wetted surfaces
- Integrated sump (US Patent #5,822,685) provides particle protection
- High overpressure rating for improved reliability

Compatible

- Cleanroom-compatible stainless steel package
- Compatible with earlier Baratron® capacitance manometers, MKS power supply/readout modules and pressure controllers




Specifications and Ordering Information

Full Scale Ranges	10, 20, 100, 500, and 1000 Torr
Resolution	0.001% of Full Scale
Accuracy	0.25% of Reading (including non-linearity, hysteresis, and non-repeatability)
Temperature Coefficients	
Zero	0.005% of Full Scale/°C
Span	0.04% of Reading./°C
Ambient Operating Temperature	0°C to 50°C
Volume	6.3 cc
Warm-Up Time	30 minutes
Overpressure Limit	45 psia (310 kPa)
Materials Exposed to Gases	Incoloy® and Inconel® (Optional fittings: 316 SS)
Input Power Required	±15 VDC ±5% @ 75 mA
Output Signal	Pressure: 0 to +10 VDC into > 10K Ω load
Output Relays	SPDT contacts rated at 1 Amp @ 30 VDC or 0.5 Amp @ 30 VAC resistive
Trip Point Level Signal	0.01 to 10 VDC for each trip point
Fittings	
Standard	1/2" (12.7 mm) tubulation
Optional	8 VCR® female, Mini-CF, NW 16 KF, NW 25 KF
Compliance	CE

Ordering Code Example: 623F11TAE

Model	Code	Configuration
623F	623F	623F
Ranges mmHg (Torr)		
10	11T	11T
20	21T	
100	12T	
500	52T	
1000	13T	
Fittings		
1/2" Tube	A	A
8 VCR	B	
Mini-CF	C	
NW 16 KF	D	
8 VCO Female	E	
2 3/4" Rotatable CF	L	
NW 25 KF	Q	
Accuracy (% of Reading)		
0.25%	E	E
0.15% (Optional 10, 100, and 1000 Torr only)	D	

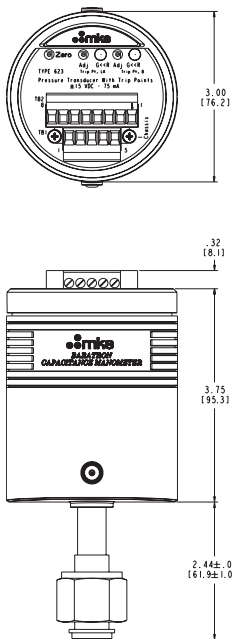

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

623F - 3/19
© 2017-2019 MKS Instruments, Inc.
All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. VCR® and VCO® are registered trademarks of Swagelok Co., Solon OH. Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV.