



Pressure &

Solutions Vacuum Measurement

WWW.MKSINST.COM

D25F

HEATED (100°C) DUAL-RANGE ABSOLUTE BARATRON® CAPACITANCE MANOMETER WITH TRIP POINTS

The D25F dual-range manometer, an application-specific absolute Baratron® capacitance manometer, is the latest addition to the MKS family of general purpose manometers. With two distinct measurement outputs, the D25F provides accurate, reliable, and repeatable pressure measurements for multi-step processes. The D25F is heated to 100°C, and is available in Full Scale ranges of 10, 100 and 1000 Torr, with a customer specified second output at 2, 5, or 10 times lower Full Scale. The lower pressure limitation of system A/D resolution is now minimized with higher output signal levels. The instrument operates with ± 15 VDC ($\pm 5\%$) input at 600 mA (max.), and provides two outputs of 0 to 10 VDC linear with pressure.

The sensor of the D25F exposes only Inconel® to the process permitting the use with corrosive or dirty gases. Measurements are independent of gas composition. The D25F also features two trip point relays, each separately adjustable from 0.1 to 100% of Full Scale. Dual color LEDs indicate relay status. Typical relay uses include pump cross-over and valve activation. The modern stainless steel enclosure provides a cleanroom compatible product.

Features & Benefits

Accurate

- Second output provides greater resolution over the lower range of the instrument
- Percent of Reading accuracy for more repeatable output signal
- Provides improved sensitivity for system I/O architecture with limited A/D resolution
- Measures total pressure directly, independent of gas composition

Robust

- All Inconel corrosion resistant wetted surfaces
- Integrated sump (US Patent #5,822,685) provides particle protection

- High overpressure rating for improved reliability

Compatible

- Cleanroom-compatible stainless steel package
- Compatible with earlier Baratron capacitance manometers, MKS power supply/readout modules and pressure controllers




Specifications and Ordering Information

Full Scale Ranges	10, 100, 1000 Torr
Resolution	0.001% of Full Scale
Accuracy	0.25% of Reading (including non-linearity, hysteresis, and non-repeatability)
Temperature Coefficients	
Zero	0.002% of Full Scale/°C
Span	0.02% of Reading/°C
Ambient Operating Temperature	15°C to 50°C
Volume	6.3 cc
Warm-Up Time	2 hours
Overpressure Limit	45 psia (310 kPa)
Materials Exposed to Gases	Inconel® (Optional Fittings: 316 SS)
Input Power Required	±15 VDC ±5% @ 0.6 Amps (max.)
Output Signal	Pressure: 0 to +10 VDC into > 10K W load; second output 0 to 10 VDC into > 10K W load over lower range
Output Relays	SPDT contacts rated at 1 Amp @ 30 VDC or 0.5 Amp @ 30 VAC resistive
Trip Point Level Signal	0.01 to 10 VDC for each trip point (first output only)
Fittings	Standard: 1/2" (12.7 mm) tubulation; Optional: 8 VCR® female, Mini-CF, NW 16 KF, NW 25 KF
Compliance	CE

Ordering Code Example: D25F11TBAEB2

Model	Code	Configuration
D25F	D25F	D25F
Ranges mmHg (Torr)		
10	11T	
100	12T	11T
1000	13T	
Fittings		
1/2" Tube	BA	BA
8 VCR	CE	
Mini-CF	HA	
NW 16 KF	GA	
NW 25 KF	GC	
Accuracy		
0.25%	E	E
Connector		
15 pin Type "D" with Thread Locks	B	B
15 pin Type "D" with Slide Locks	P	
Second Range Gain Ratio		
2 to 1	2	2
5 to 1	5	
10 to 1	0	

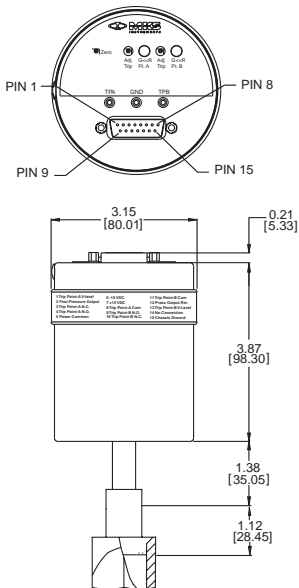

Dimensional Drawing —
 Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
 Andover, MA 01810
 Tel: 978.645.5500
 Tel: 800.227.8766 (in U.S.A.)
 Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
 Andover, MA 01810
 Tel: 978.975.2350

D25F - 3/19
 © 2014-2019 MKS Instruments, Inc.
 All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. VCR® is a registered trademark of Swagelok® Co., Solon, OH. Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV.