



2x M4 x 0.235 (5.97) ↓ TAP  
 0.265 (6.73) ↓ DRILL  
 180° APART ON A ø1.65 (ø41.91) BC

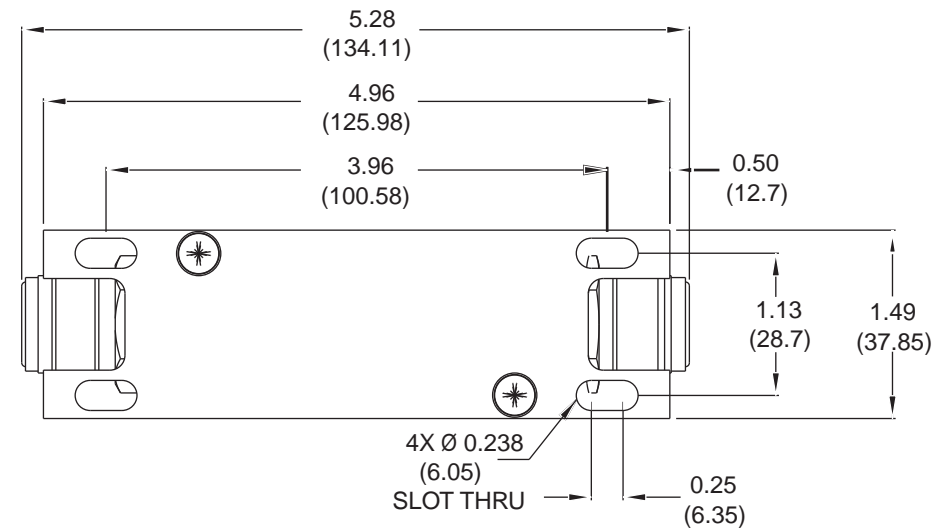

BOTTOM VIEW WITH 8 VCR FITTINGS 4 PLACES  
 (INCLUDES 0.12 THK. MOUNTING PLATE AND (2) SCREWS)

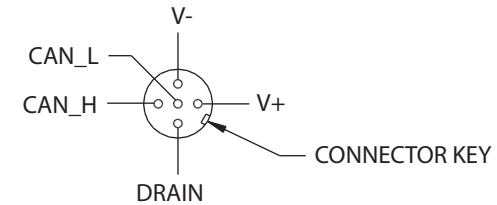

PinOut For DeviceNet™

- PIN SIGNAL
- 1 Valve Test Pt
  - 2 Flow Signal Output
  - 3 Valve Close
  - 4 Valve Open
  - 5 Pwr Common
  - 6 -15 VDC
  - 7 +15 VDC
  - 8 Set Point Input
  - 9 Zero
  - 10 Optional Input
  - 11 Signal Gnd
  - 12 Signal Gnd
  - 13 No Connection
  - 14 No Connection
  - 15 Chassis Gnd

15 Pin D PinOut (MKS)

- PIN SIGNAL
- 1 Signal Gnd 1
  - 2 Flow Signal Output
  - 3 Not Used
  - 4 Not Used
  - 5 +15 VDC
  - 6 -15 VDC
  - 7 Valve Test Pt
  - 8 Setpoint Input
  - 9 Power Common
  - 10 Signal Gnd 2
  - 11 +5 VDC Ref
  - 12 Valve Override
  - 13 Not Used
  - 14 Chassis Gnd
  - 15 Ext Sensor Input

15 Pin D PinOut (Alternate)