

AA07A and AA08A

Micro-Baratron® Pressure Transducers



Today's process tools and equipment require reliable transducer and display performance in small geometrics with multiple fitting options. MKS addresses these issues with a building block design approach, allowing for custom configuration to meet your exact needs.

For more than three decades, MKS Baratron® capacitance manometer technology yields the most stable, accurate, and reliable sensors available today. Sensor construction is intrinsically durable with well-matched materials to provide extremely low thermal coefficient for wide temperature range performance.

This highly accurate and stable sensor technology is combined with sophisticated electronics to further optimize performance in an EMI/RFI insensitive high-level output. Enhanced accuracy, long-term stability, and low temperature coefficients produce the repeatability critical to today's gas measurement applications. As a result, the AA07A and AA08A pressure transducers offer higher accuracy, superior value, and reliable performance.

Accuracy is specified as a percent of Reading, not Full Scale, as seen in some of the lower performance devices. Percent of Reading accuracy provides you with an even more accurate output signal in the lower scale of the pressure range — where it is needed most. (Figure 1).

The AA07A/AA08A transducers are ideally suited for use in delivery systems that feed ultrapure gases to critical process systems. Their wetted surfaces exposed to the gas stream have a finish of better than 10µin Ra. These transducers exhibit superior dry-down characteristics, and contribute no particles above background. After manufacture and assembly, they are purged with ultraclean nitrogen prior to double bagging in a class 100 environment.

Product Features

- Proven capacitance technology at a competitive price
- Incoloy® wetted surface provides superior corrosive gas and liquid compatibility
- Available models include 4 to 20mA output
- Highest overpressure ratio tolerances on the market assure no degradation in zero repeatability or performance
- Accuracy specified in % of Reading for superior results in lower pressure ranges
- Optional integrated display gives local reading of line pressure (1000 Torr, 100 and 250 psia ranges)
- Replaceable electronics



Key Benefits

- Higher Accuracy
- Reliable Performance
- Superior Value

The all-Incoloy® construction of the sensors in the AA07A/AA08A allows for high overpressure tolerances that reduce errors due to line pressure spikes. High burst pressure ratings contribute to overall system safety. On existing gas cabinets and process systems, field replacement of common dial gauges or lower performance transducers is made easy due to the small size, industry standard end-to-end lengths, and electrical interface choices of these transducers.

A variety of fittings are available in different styles and sizes. A selection of power supply inputs (+12 to +32 VDC), output signals (0-5 or 0-10 VDC, or 4-20 mA two-wire), and connectors (9-pin or 15-pin Type "D", Bendix®, or flying leads) enable the equipment or manufacturing engineer to easily interface the AA07A/AA08A pressure transducers with virtually any control system.

The optional local integrated display provides a digital readout of the line pressure at the transducer. The display, which is available on the 1000 Torr, 100 and 250 psia ranges with the 0-10 VDC output signal, provides a highly-visible red LED

display of the pressure and the units of measurement. The display can also be switched to show any of four different units (psia, Torr, bar, and kPa) without requiring recalibration or re-ranging of the transducer itself. It takes its power from the incoming transducer voltage, so no additional cables are required.

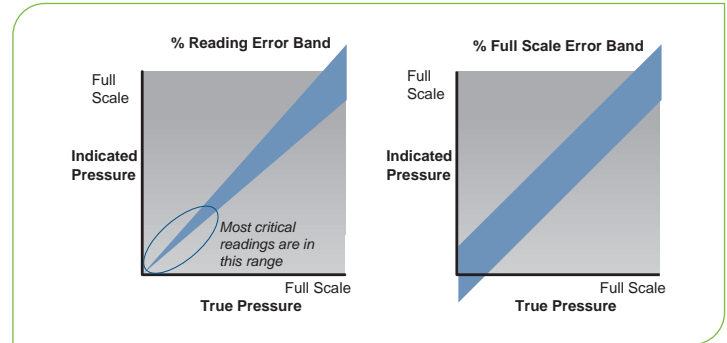


Figure 1
Comparison of MKS repeatability expressed as percent of Reading transducer versus other percent of Full Scale transducers.

Configuration

AA07A	Ultraclean, single-ended
AA08A	Ultraclean, flow-through

Full Scale Ranges

AA07A	1000 Torr to 3000 psia
AA08A	1000 Torr to 3000 psia

Accuracy (including non-linearity, hysteresis, and non-repeatability)

1.0% of Reading (NIST traceable calibration sheet provided from 10% to 100% of Full Scale)

Temperature Coefficients

Zero	0.02% of Full Scale/°C, 50 psia to 3000 psia; 0.04% of Full Scale/°C, 1000 Torr
Span	0.04% of Reading/°C, 50 psia to 3000 psia; 0.08% of Reading/°C, 1000 Torr

Ambient Operating Temperature

0° to 50°C (32° to 122°F)

Overpressure Limit¹

1.5× Full Scale for ranges from 1000 Torr to 500 psi
1.2× Full Scale for ranges from 501 to 3000 psi

Burst Pressure

10× Full Scale for ranges from 1000 Torr to 500 psi
5× Full Scale for ranges from 501 to 3000 psi

Materials Exposed to Gases

Incoloy®

Wetted Surfaces

< 10µin Ra max.

Input Power Required

0 to 10 Volt output	+13 VDC to +32 VDC @ 10 mA max.
0 to 5 Volt output	+12 VDC to +32 VDC (regulated if below 13 VDC) @ 10 mA max.
2-wire 4-20 mA output	+13 to +32 VDC excitation

Output Signal

0 to 10 VDC	into > 10K Ω load
0 to 5 VDC	into > 10K Ω load
2-wire 4-20 mA output with	Into 0 to 900 Ω load (depending on excitation)
+13 to +32 VDC at transducer terminals	

Electrical Connectors

Male 9-pin at end of 9" flying lead, male 15-pin high density D type connector at end of 9" flying lead, Bendix® at end of 9" flying lead, or 6' or 10' flying leads
--

Fittings

AA07A (single-ended)	½" weld stub, ¼" weld stub, ¼" buttweld "T", 4 VCR® male, 4 VCR® female
AA08A (flow-through)	¼" weld stub, 4 VCR® male, 4 VCR® female, surface mount

Compliance²

CE

¹ The pressure at which the transducer can be subjected without degradation of performance when returned to a normal operation pressure range.



² For CE compliance, the mating connection must be properly grounded.

Dimensional Drawings




AA07A Single-ended

AA08A Flow-through









Connectors

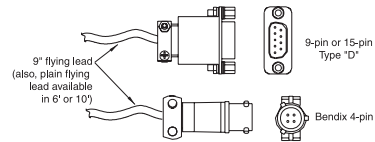

Transducers

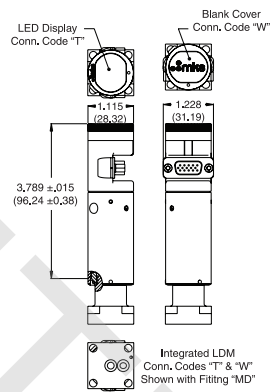

Fittings

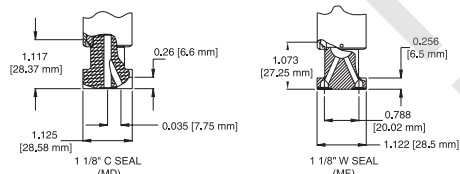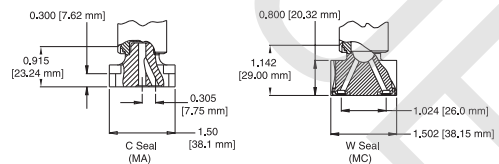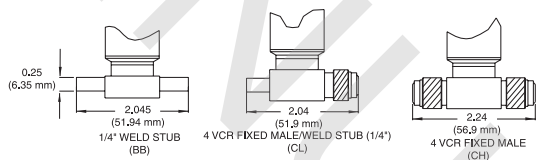

Ordering Information

Ordering Code Example: AA07A33PCB2GA1	Code	Configuration	
AA07A Single-ended AA08A Flow-through	AA07A AA08A	AA07A	
Pressure Range Full Scale			
1000 Torr 100 psia 250 psia 1000 psia 3000 psia	13T 12P RDP 13P 33P	33P	
Fittings			
AA07A only: ½" weld stub ¼" weld stub ¼" buttweld "T" 4 VCR male, rotatable 4 VCR female	BA BB BD CB CD	CB	
AA08A only: ¼" weld stub (2.045" face-to-face) ¼" weld stub (1.85" face-to-face) 4 VCR male, nonrotatable (2.78" face-to-face) 4 VCR male, nonrotatable (2.24" face-to-face) 4 VCR female (2.95" face-to-face) 4 VCR male, nonrotatable / ¼" weld stub 4 VCR female (3.045" face-to-face) 1.5" C-seal surface mount 1.5" W-seal surface mount 1 1/8" C-seal surface mount 1 1/8" W-seal surface mount	BB BE CA CH CJ CL CM MA MC MD MF		
Input/Output			
+13 to +32 VDC/0-10 VDC +12 to +32 VDC/0-5 VDC 4-20 mA with +13 to +32 VDC at terminals	2 3 4		2
Accuracy			
1% of Reading	G		G
Connectors			
9-pin type D at end of 9" flying lead 15-pin high density type D at end of 9" flying lead Bendix 4-pin at end of 9" flying lead 6' flying leads 10' flying leads Bendix 4-pin 4-20 mA on pins A&B LDM-C (Red LED), 0-5 VDC and 0-10 VDC with high density D connector LDM-C (with Blank Cover), 0-5 VDC and 0-10 VDC with high density D connector	A C D F L H T W		A
Environmental			
Standard enclosure (indoor use) Optional NEMA 4 enclosure for water, ice and dust (not available with connector codes A, C, T or W)	1 4		1



www.MKSINST.com

+1-978-645-5500 | +1-800-227-8766

AA07A & AA08A_01/20

©2020 MKS Instruments, Inc.

Specifications are subject to change without notice.

Some Baratron® capacitance manometer products may not be exported or re-exported to many countries without both US and local government export licenses under ECCN 2B230.

mksinst® is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. Incoloy® is a registered trademark of Inco Alloys International, Inc. Huntington, WV. VCR® is a registered trademark of Swagelok® Co., Solon, OH. Bendix® is a registered trademark of Amphenol Corp., Bendix Connector Operations, Sidney, NY.